


PROPORTIONAL VALVE DEDICATED CONNECTOR

Provide reliable connection solutions

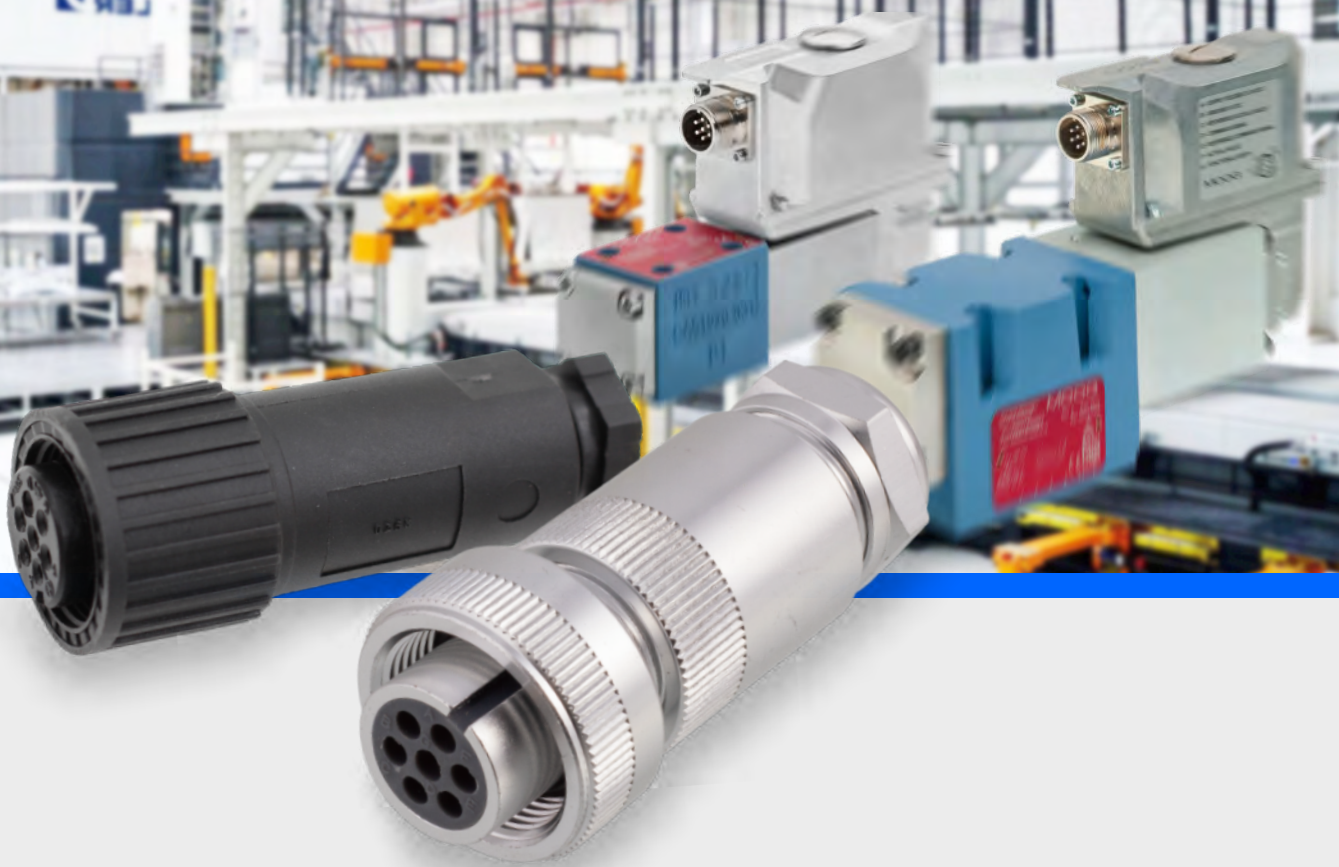

Proportional valve dedicated connector

Provide two material products: metal type, plastic type

Metal type: high intensity, high temperature resistance, low temperature resistance

Plastic type: engineering plastic, cost-effective

Can provide customized services for wire harness processing



MATERIAL AND TECHNICAL METHODS			
Coupling	Thread terminal	Termination way	Solder
Shell material	Aluminum shell plating /Reinforced nylon	Contact numbers	500 cycles
Insulator	Silicon rubber/Reinforced nylon	Temperature range	-55°C ~ +125°C
Contact material	Copper(silver/gold-plated)	Cable diameter	φ8mm ~ ≤ φ11mm

DESCRIPTION	FIGURE	DIMENSIONS	CONTACTS	ORDER NO.
Straight metal assembled plug			4	C14G-A-S4
			6+PE	C14G-A-S7
Metal square flange socket			4	C14G-H-P4
			6+PE	C14G-H-P7
Straight plastic assembled plug			6+PE	C14P-A-S7
Plastic square flange socket			6+PE	C14P-H-P7

CHARACTERISTIC PARAMETERS		THE HOLE PLACE ARRANGES (COMPLY WITH THE NEEDLE DIRECTION)
Rated current/voltage (AC.V)minute	13A/200V	
Operating voltage (AC.V)minute	260	
Withstanding voltage (AC.V)minute	1000	
Insulation impedance (MΩ) DC 500V	1500	
Contact impedance (MΩ) DC 1A	6	
Solder cup mouth aperture φ(mm)	1.3	
Solder inter diameter φ(mm)	1.6	

APPLICABLE BRANDS

Shenzhen CAZN Electric Co., LTD

5th Floor, C Building, Anlom Industrial Park, No 381 Huating Road, Dalang Street, Longhua district, Shenzhen China.

Tel: 0755 - 29005959 Fax: 0755 - 2900 5530
 Email: sales@caznlink.com
 Website: www.caznlink.com



DOUYIN ACCOUNT



OFFICIAL ACCOUNT



BUSINESS CONTACT